### **Features**

- 6 hydromassage jets can be individually adjusted for water flow and direction
- Variable-speed pump for adjusting hydromassage intensity
- 10 backjets target the lower back and shoulders to relieve tension and encourage deep breathing
- Adjustable neckjet pillow with 2 jets provides a stimulating, stress-relieving neck massage
- Chromatherapy lighting allows you to select a preferred color scheme to suit your mood
- Built-in heater
- Electronic keypad
- Remote control
- Safequard™ slip-resistant surface provides excellent traction Codes/Standards
- Drilled for grab bars (required); sold separately

## Material

KOHLER® enameled cast iron

## **Hydrotherapy**

- 8 effervescence ports deliver gentle, caressing bubbles
- Whirlpool
- **Backiets**
- Neckjets
- Chromatherapy

#### Installation

- Drop-in
- Requires cable pop-up bath drain and bath drain trim (sold separately)

## Required Products/Accessories

K-9653 Grab bars for whirlpool baths with Spa/Massage package

or

K-23857 Bath drain trim

or

K-78440 33" cable pop-up bath drain

## **Recommended Products/Accessories**

K-9696 Whirlpool 6-Jet Trim Kit

K-23726 Drain treatment

K-23725 Cast iron cleaner

K-31796 Above-the-floor bath drain kit

K-31798 Bath drain kit



ASME A112.19.1/CSA B45.2 ASME A112.19.7/CSA B45.10 ASTM F462 UL 1795 CSA C22.2 No. 218.2

# **KOHLER® Enameled Cast Iron Bath** and Shower Base Lifetime Limited WarrantyKOHLER® Hydrotherapy **Components Five-Year Limited** Warrantv

See website for detailed warranty information.

## **Available Colors/Finishes**

Color tiles intended for reference only.


Color	Code	Description
	0	White
	96	Biscuit
	NY	Dune
	95	Ice™ Grey
	58	Thunder™ Grey
	7	Black Black™



# Tea-for-Two™



66" x 36" drop-in Effervescence whirlpool bath **K-856-V** 

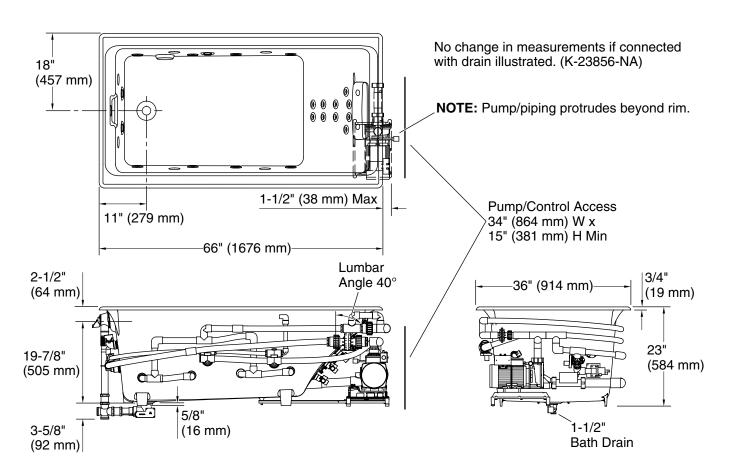

## **Required Electrical Service**

One dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI). Outside North America, this device may be known as a Residual Current Device (RCD).

Pump, Heater: 240 V, 20 A, 50/60 Hz

## **Technical Information**

All product dimensions are nominal.

Installation: Drop-in

Drain location: Reversible

Basin area, bottom: 45" x 25" (1143 mm x 635 mm) Basin area, top: 58" x 29" (1473 mm x 737 mm)

Weight: 510 lbs (231.3 kg)
Minimum floor load: 81 lbs/ft² (395.5 kg/m²)

Water depth: 18" (457 mm)
Water capacity: 96 gal (363.4 L)

Cutout: Drop-in, 65-1/2" x 35-1/2" (1664 mm x

902 mm)

Electrical component Pump: 240 V, 11 A, 50/60 Hz rating: Heater: 240 V, 6 A, 1500 W

## **Notes**

Measure your actual product for rough-in details.

Install this product according to the installation instructions.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

Kit is required for under-mount installations (sold separately).

Cast iron whirlpools are extremely heavy, making some drop-in installations difficult. Splitting the deck/surround is recommended if installing into a deck.

1-800-4KOHLER (1-800-456-4537)

5-5-2023 06:32 - US/CA

Kohler Co. reserves the right to make revisions without notice to product specifications. For the most current Specification Sheet, go to <a href="https://www.kohler.com">www.kohler.com</a>.

