

Features

- One-piece, self-contained ceramic disc valve allows both volume and temperature control
- Two function sprayhead with touch control: Sweep™ spray and aerated stream settings
- Dishwasher-safe, removable white, black, and taupe silicone handles
- ProMotion™ technology's light, quiet braided hose and swiveling ball joint make the pull-down sprayhead easier and more comfortable to use
- Includes flexible supply line
- Includes 10-1/2" (267 mm) escutcheon plate and refillable 16 fluid ounce (473 ml) soap dispenser
- 1.5 gpm (5.7 lpm) maximum flow rate at 60 psi (4.14 bar)
- DockNetik™ secure docking system locks sprayhead into place when not in use

Material

- Premium metal construction for durability and reliability

Installation

- Single-, two-, three-, or four-hole installation
- Left- or right- handle installation and 360° spout rotation



ADA

CSA B651

Codes/Standards

ASME A112.18.1/CSA B125.1

NSF/ANSI/CAN 61

NSF/ANSI/CAN 372

All applicable US Federal and State material regulations

DOE - Energy Policy Act 1992

California Energy Commission (CEC)


ADA

ICC/ANSI A117.1

CSA B651

KOHLER® Faucet Lifetime Limited Warranty

See website for detailed warranty information.

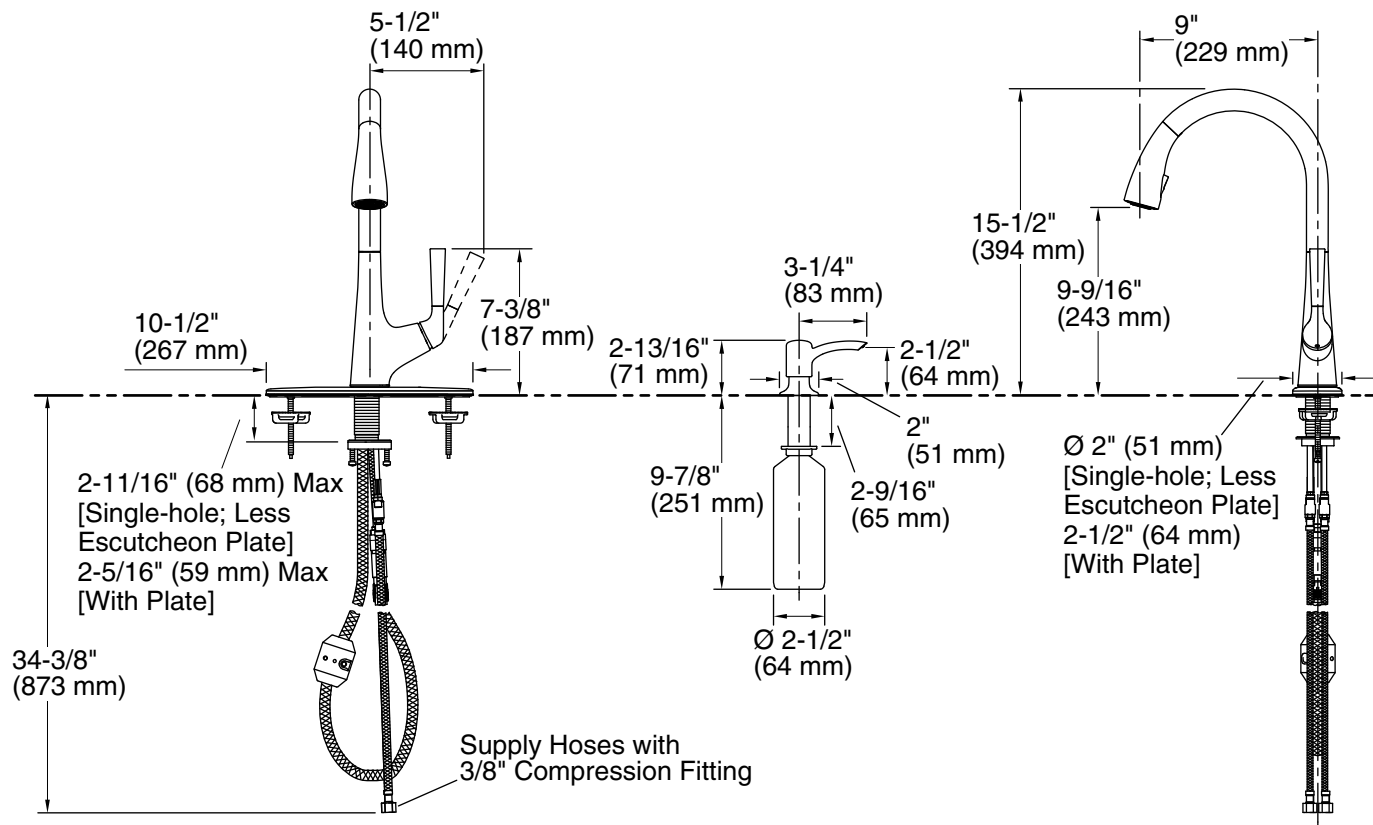

Technical Information

All product dimensions are nominal.

Spout:

Spout reach: 9" (229 mm)

Notes

Install this product according to the installation guide.

ADA complaint for faucet handles only.

ADA, CSA B651 compliant when installed to the specific requirements of these regulations.