Features
- Three-function pull-out sprayhead with touch-control allows you to switch between spray, laminar flow, and pause
- KOHLER® ceramic disc valves exceed industry longevity standards for a lifetime of durable performance
- ProMotion® technology's light, quiet braided hose and swiveling ball joint make the pull-down sprayhead easier and more comfortable to use
- MasterClean™ sprayface features an easy-to-clean surface that withstands mineral buildup and maximizes spray performance
- High-arch gooseneck spout and 360° spout rotation offer superior clearance for filling pots and cleaning
- Single lever handle is simple to use and makes adjusting water temperature easy
- Temperature memory allows faucet to be turned on and off at the temperature set during prior usage
- 1.5 gpm (5.7 lpm) maximum flow rate at 60 psi (4.14 bar)

Material
- Premium metal construction for durability and reliability
- KOHLER® finishes resist corrosion and tarnishing

Installation
- For single-hole installation
- Flexible supply lines simplify installation

Recommended Products/Accessories
K-77685 Single-Cartridge Water Filtration System
K-77686 Double-Cartridge Water Filtration System
K-77687 single replacement filter cartridge
K-77688 Replacement Filter Cartridges, Two-Pack
K-23723 Faucet cleaner

ADA	CSA B651

Codes/Standards
ASME A112.18.1/CSA B125.1
NSF/ANSI/CAN 61
NSF/ANSI/CAN 372
All applicable US Federal and State material regulations
DOE - Energy Policy Act 1992
California Energy Commission (CEC)
ADA
ICC/ANSI A117.1
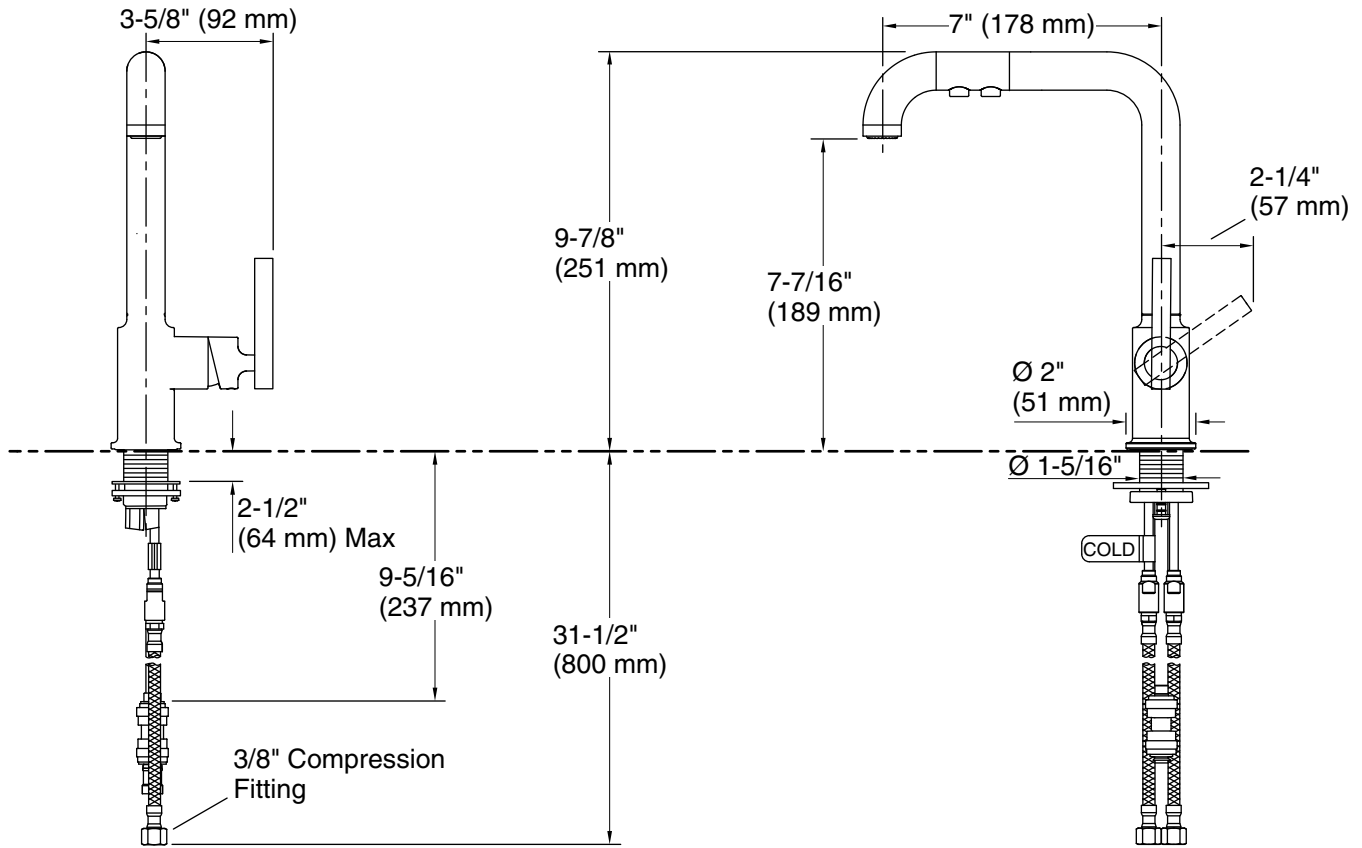CSA B651
IAPMO Certification

KOHLER® Faucet Lifetime Limited Warranty
See website for detailed warranty information.

Available Colors/Finishes
Color tiles intended for reference only.

Color	Code	Description
	CP	Polished Chrome
	SN	Vibrant® Polished Nickel
	VS	Vibrant® Stainless
	BL	Matte Black
	2MB	Vibrant® Brushed Moderne Brass

1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current Specification Sheet, go to www.kohler.com USA or www.kohler.ca Canada
2-25-2024 20:02 - US

THE BOLD LOOK OF **KOHLER**®

3-5/8" (92 mm)

7" (178 mm)

9-7/8" (251 mm)

7-7/16" (189 mm)

2-1/4" (57 mm)

Ø 2" (51 mm)

Ø 1-5/16"

COLD

2-1/2" (64 mm) Max

9-5/16" (237 mm)

31-1/2" (800 mm)

3/8" Compression Fitting

Technical Information
All product dimensions are nominal.

Notes
Install this product according to the installation guide.

ADA complaint for faucet handles only.

ADA, CSA B651 compliant when installed to the specific requirements of these regulations.