

Features

- 2.5 gpm (9.5 lpm) maximum flow rate.
- Ergonomic design is easy to use.
- Changing sprays is as easy as turning the head on its axis.
- Komotion™ spray delivers a soothing, circular water pattern.
- Kotton™ spray releases a dense, luxurious downpour of water.
- Kurrent™ spray offers a targeted massage to ease away aches and pains.
- Adjustable angle for various user heights.
- Shower hose sold separately.
- With innovative Flipstream® technology, the Flipside® handshower dedicates a single sprayhead surface to each of four unique sprays.

Material

- KOHLER finishes resist corrosion and tarnishing.
- Koverage® spray delivers full-coverage spray for everyday showering.

Installation

- Bracket or slidebar required for wall-mount installation.
- Deck-mount holder required for deck-mount installation.

Required Products/Accessories

K-8593 72" Shower Hose

or

K-9514 60" Shower Hose

Recommended Products/Accessories

K-23723 Faucet cleaner



OBC

Codes/Standards




ASME A112.18.1/CSA B125.1
DOE - Energy Policy Act 1992
OBC



KOHLER® Faucet Lifetime Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.

| Color | Code | Description |
|---|------|--------------------------|
|  | CP | Polished Chrome |
|  | SN | Vibrant® Polished Nickel |
|  | BN | Vibrant® Brushed Nickel |
|  | 2BZ | Oil-Rubbed Bronze |

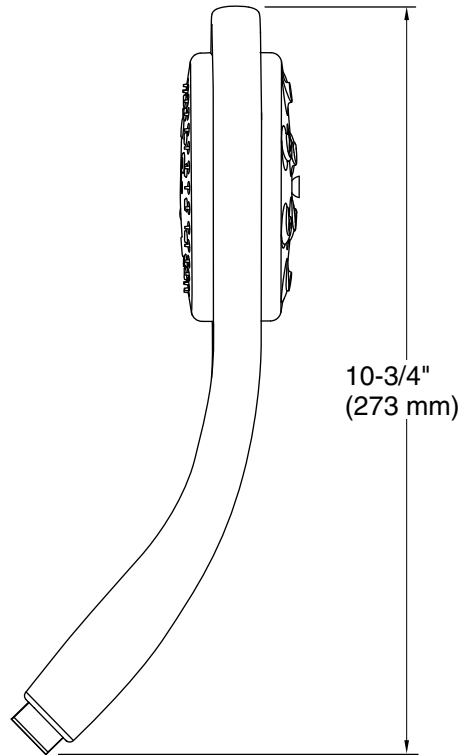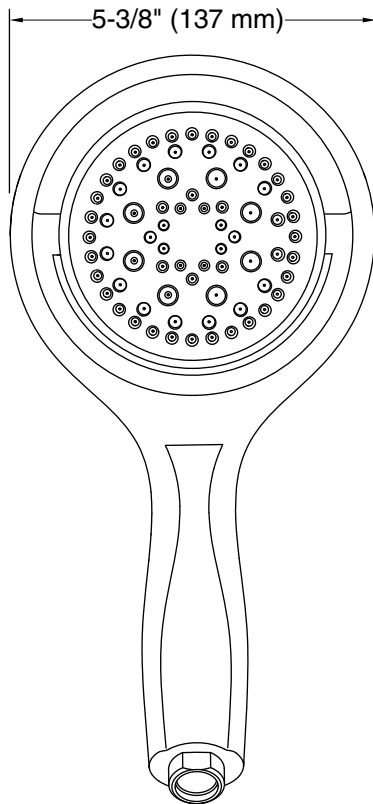

Technical Information

All product dimensions are nominal.

Drain included: No

Notes

For use with automatic compensating valves rated at 2.5 gal/min (9.5 l/min) or less.

Install this product according to the installation guide.

Plumbing codes require an atmospheric vacuum breaker (such as Kohler Model K-9660) be installed in-line with handshowers.

Please consult with local plumbing officials.

OBC compliant when installed to the specific requirements of these regulations.