Purist®

KOHLER, Faucets Rite-Temp® shower trim kit with lever handle, 2.5 gpm K-TS14422-4

Features

- THIS NEW K-TS14422-4 TRIM REPLACES THE EXISTING K-T14422-4 TRIM. THE NEW TRIM IS IDENTICAL AND INCLUDES TRIM ADAPTER KITS FOR BOTH RITE-TEMP K-304/K-2971 HIFLOW AND THE NEW K-8304 SERIES VALVE
- Pressure-balancing diaphragm technology maintains outlet temperature within +/-3°F during water pressure fluctuations
- Antiscald protection
- A single handle controls both on/off activation and temperature setting
- Includes faceplate with ADA-compliant metal level handle
- Includes single-function 2.5 gpm (9.5 lpm) showerhead
- MasterClean[™] sprayface features an easy-to-clean surface that withstands mineral buildup and maximizes spray performance
- Includes shower arm and flange
- Coordinates with Purist faucets, accessories, and showering components to complete your bathroom

Material

- Premium material construction with metal handle ensures reliability and durability
- KOHLER® finishes resist corrosion and tarnishing

Installation

 Trim only; requires valve to complete installation (sold) separately)

Required Products/Accessories

K-8304 Series Rite-Temp® Valve & Cartridge Kits or

K-8300 Series Rite-Temp® Valve Body Rough-ins K-8305 Series Rite-Temp® Cartridges

Recommended Products/Accessories

K-23723 Faucet cleaner

Optional Products/Accessories

K-10350 Deep rough-in kit K-10351 Test cap for K-8300 Series valve bodies





Codes/Standards

ASME A112.18.1/CSA B125.1 DOE - Energy Policy Act 1992 IAPMO Certification

KOHLER® Faucet Lifetime Limited Warrantv

See website for detailed warranty information.

Available Colors/Finishes


Color tiles intended for reference only.

Color Code Description





Purist® KOHLER, FAUCETS Rite-Temp® shower trim kit with lever handle, 2.5 gpm K-TS14422-4

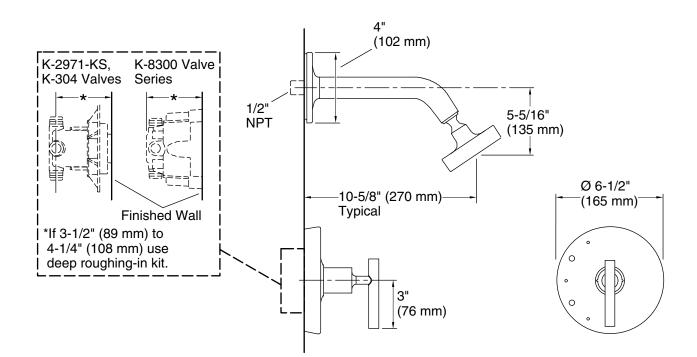

Technical Information

All product dimensions are nominal.

Drain included: No

Showerhead/Body Spray:

Rated maximum
flow:2.5 gal/min (9.5 l/min)Pressure:80 psi (5.5 bar)

Notes

Install the product according to the installation guide.

NOTICE: Risk of product damage. Long screws for installing trim can damage the K-2971-KS valve. Consult the trim installation guide to verify if the thin wall installation kit (88526) is needed.

