KOHLER, Faucets

Single-function showerhead, 2.5 gpm **K-24805**

Features

- Single-function showerhead with 48 nozzle 5" (127 mm) diameter sprayface
- Optimized sprayface for maximum performance
- 2.5 gpm (9.5 lpm) maximum flow rate at 45 psi (3.1 bar)
- MasterClean™ sprayface features an easy-to-clean surface that withstands mineral buildup and maximizes spray performance
- Coordinates with other products in the Parallel collection

Material

- Premium material construction for durability and reliability
- KOHLER® finishes resist corrosion and tarnishing

Technology

 Katalyst® air-induction technology infuses water with air, creating bigger drops for a more powerful spray

Installation

- 1/2 -14 NPT connection
- Wall-mount

Recommended Products/Accessories

K-7397 Shower Arm and Flange



Codes/Standards

ASME A112.18.1/CSA B125.1 DOE - Energy Policy Act 1992 IAPMO Certification

KOHLER® Faucet Lifetime Limited Warranty


See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.

| Color | Code | Description |
|-------|------|--------------------------|
| | CP | Polished Chrome |
| | SN | Vibrant® Polished Nickel |
| | BN | Vibrant® Brushed Nickel |
| | BV | Vibrant® Brushed Bronze |
| | BV | Vibrant® Brushed Bronze |
| | BL | Matte Black |
| | 2MB | Vibrant® Brushed Moderne |
| - | | Brass |
| | TT | Vibrant Titanium |



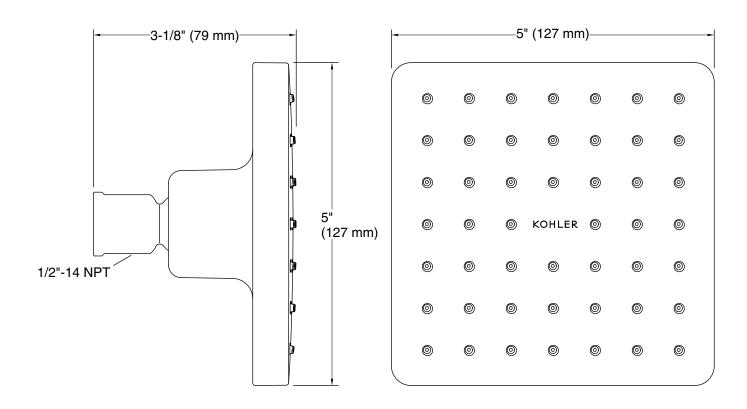

Technical Information

All product dimensions are nominal.

Drain included: No

Showerhead/Body Spray:

Rated maximum 2.5 gal/min (9.5 l/min)

flow:

Pressure: 45 psi (3.1 bar)

Notes

Install this product according to the installation instructions.

