

### Features

- For use with DTV+™ digital shower system installations
- Integrated Chromatherapy lighting with solid colors, color dial, and preprogrammed color effects
- Four 22-nozzle sprayheads - Individually adjustable pivoting sprayheads simulate a gentle summer rain showering experience
- Low-profile design complements any decor
- 0.6 gpm maximum flow rate from each sprayhead for a maximum combined flow of 2.4 gpm
- MasterClean™ sprayface features an easy-to-clean surface that withstands mineral buildup
- 1/2" NPT connection

### Material

- KOHLER finishes resist corrosion and tarnishing

### Installation

- Integrated system for ceiling-mount installation
- Soldering template included for ease of installation




### Codes/Standards

ASME A112.18.1/CSA B125.1  
DOE - Energy Policy Act 1992

**KOHLER® Faucet Lifetime Limited  
Warranty**

See website for detailed warranty information.

**DISCONTINUED** This product has been discontinued.

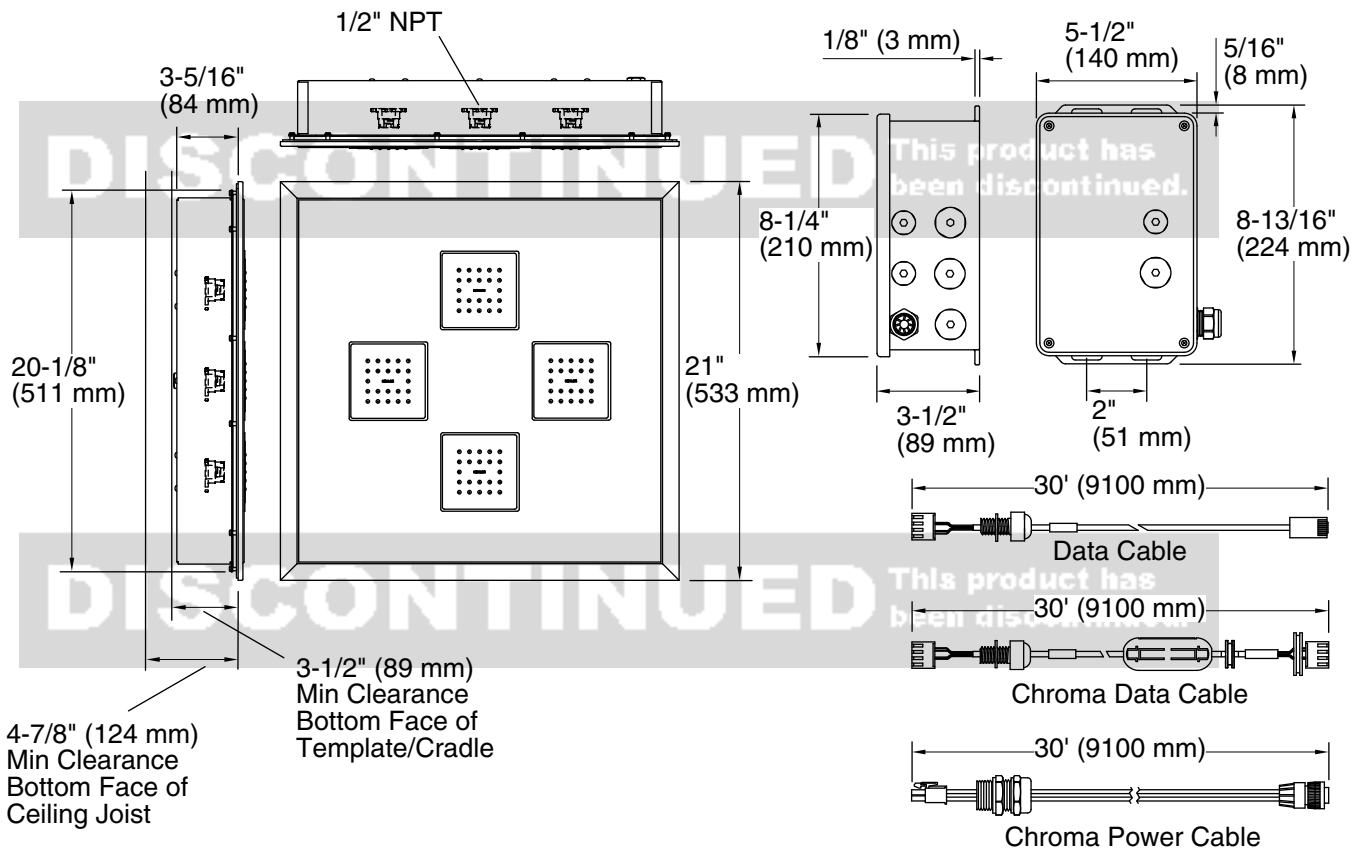

**Required Electrical Service**

One dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI). Outside North America, this device may be known as a Residual Current Device (RCD).

120-240 V, 15 A, 50/60 Hz

**Notes**

Install this product according to the installation guide.

**Technical Information**

All product dimensions are nominal.

- Power source: Plug - AC, included
- Max. Ambient temp: 104°F (40°C)
- Max. Relative humidity non-condensing: 95%

**Showerhead/Body Spray:**

- Rated maximum flow: 2.5 gal/min (9.5 l/min)
- Pressure: 80 psi (5.5 bar)